LN-DX-NEA-FH-CON

Fast Connector of neon strip

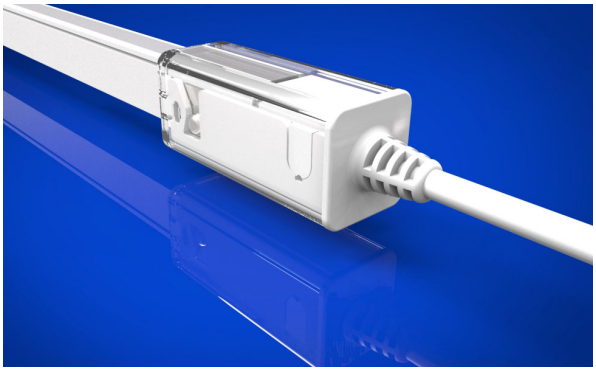

Application

- Apply to Cut Ends of Flat Top Neon Flex
- For Connecting cut Ends of LED Flexible Neon.

Features

- Dimension:51.7 x 17.7 x 15.9mm (2.04 × 0.697 x 0.626in)
- Input wire specification：20AWG
- Operating temperature: -20℃ ~ +40℃(-4℉~ +104℉)
- Storage temperature: 0℃ ~ +60℃(32℉~ +140℉)
- Humidity: 30-70%RH
- Ingress protection rating: IP65
- Input Voltage：24V
- Current capacity: 4.5A
- Color：Transparent+white
- Applied to the 8mm width neon strip.

Dimension Drawing

Unit：mm **Tolerance：±0.2mm**

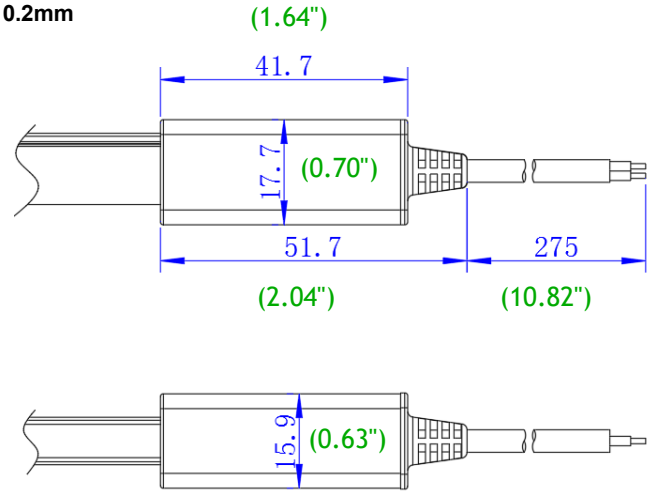

Wiring Diagram：

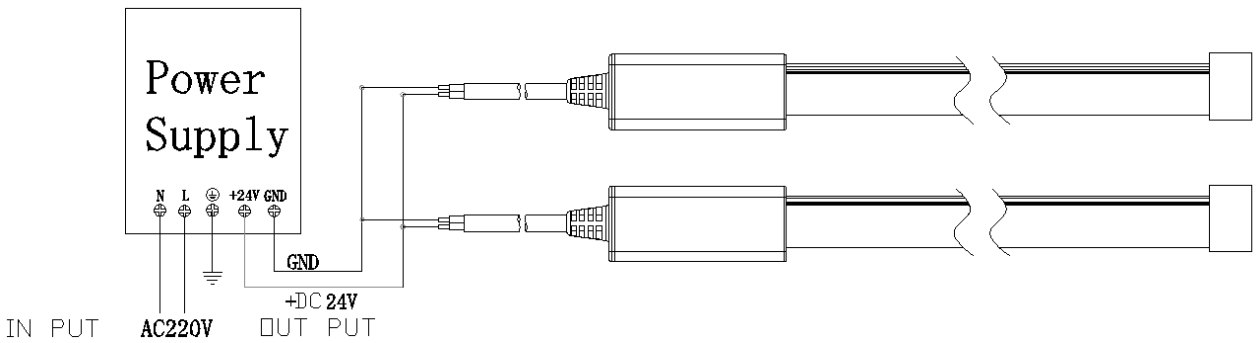

Installation guide:

The connection method of the strip:

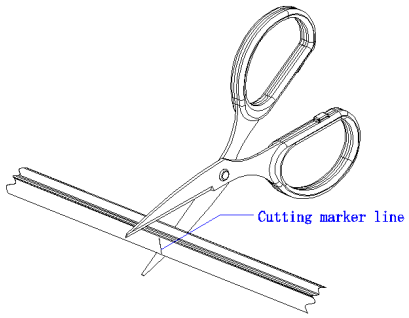

①

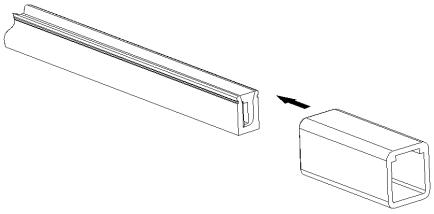

②

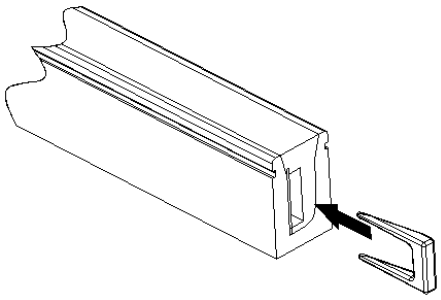

③

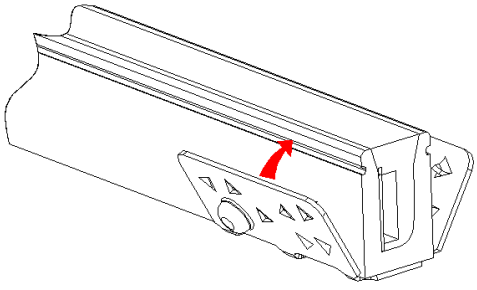

④

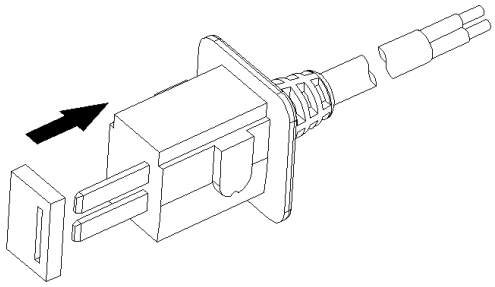

⑤

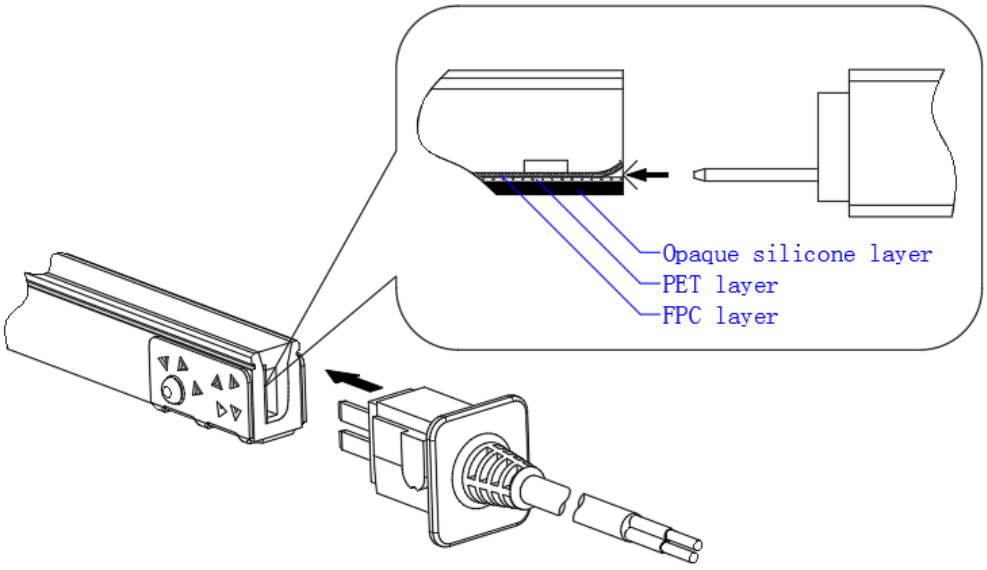

⑥

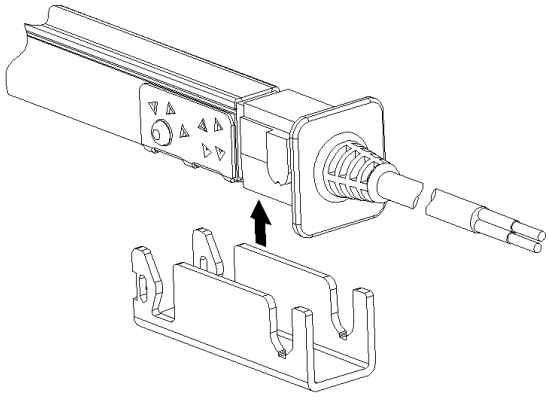

⑦

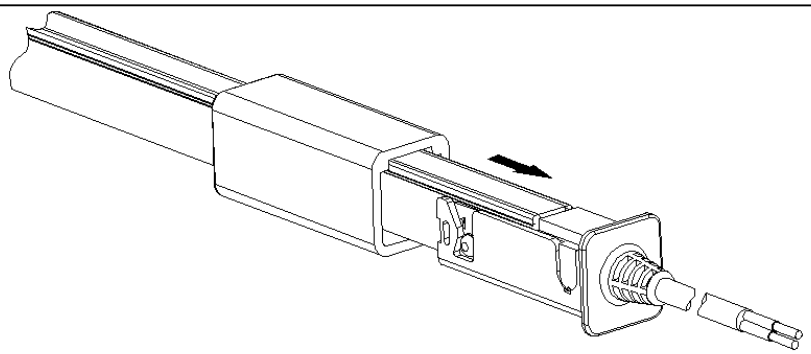

⑧

CAUTIONS

1. The connector should only be applied to the designated products of our company；
2. To guarantee waterproof effectiveness, every part of assembly should be used in install；
3. Due to the sharp structure of the connector, care must be taken during installation to avoid injury；
4. The pulling force between the input wires and the connector ≤3KG.

Warning

- Please note the careful operation, in the power source connection's situation, do not touch the alternating current supply in order to avoid any body damage.
- The product can not be connected to the high voltage line.
- Installing the product in the appropriate environment as far as possible.

** If you do not follow the above "Cautions" to operate and result in damaging the product, the factory will not accept maintenance and return.